

5inch 8MP 32X IR PoE AI PTZ Dome Camera



TD-8583IE3N(PE/32M/AR20)



HDR



Perimeter



8MP



PoE++



VCA



IP67



Smart tracking



200m



System:

TD-8583IE3N, the 3rd gen 5inch AI PTZ camera series, which adopts a high quality 32x optical zoom lens, and high computing AI SOC, could deliver excellent 3840x2160@30fps image details over a wide-open area. The PTZ camera can detect max 17 objects per scene and classify human/vehicles from 2m to 1624m in radius. When any of them intrude restricted area, the camera will trace, zoom fit in center of screen, snap and record and trigger alarms until object disappeared, greatly improving surveillance efficiency.

The 5inch Gen3 PTZ improves many aspects to further utilize AI capacity. The revised gimbal system is up to 360 °s, which could automatically track express fast large objects at 300km/h within several miles distance. The rotation mechanics is enforced to endure over 10 million times for long-time heavy usage. The 3rd gen PTZ adopts black-ray image and new stacked IR technology, which filter all the intrusive lights and focusing on human and vehicles themselves, thus it could track and recognize human details within hundreds of meters, challenging the most complex environment, whatever it is bright sun-shrine or in pitch black, snowy or rainy, strong headlights of cars and streetlamps, etc.

With competitive price, excellent picture quality and strong protection, the camera could meet the demand of 7x24Hour working in harsh weather for professional surveillance market.

Key Spec:

- Ultra fast rotation and tracking speed and over 10millions of tracking life circles.
- Superior low light performance
- Long IR supplement light distance
- 1.5Tops Deep-learning engine, support human/vehicles detection, auto-tracking
- IP67 Water immersion /true IK10 glass/6KV Surge protection,7x24H harsh weather
- Stable supply-chain, long product life circle
- Confirms to data protection regulations of major countries.

Application:

Wide range area intrusion, perimeter protection and alarm and smart tracking: such as airport, express way, parks, scenic spots, stations and venues, industrial park. Suggestion installation: at 5-10m in height.

SPECIFICATION:


Camera Module			
Image sensor		1/2.8" progressive scan CMOS image sensor (SONY IMX715)	
Max resolution		3840×2160	
Mini. Illumination		Color: 0.01 Lux @ (F1.3,AGC ON); B/W:0.002 Lux @(F1.3, AGC ON); 0 Lux with IR	
Image setting		Flip, Mirror, Saturation, Brightness, Contrast, Sharpness, AGC, etc. adjusted by client	
Shutter Speed		60Hz: 1/30s – 1/30,000s; 50Hz: 1/25s~1/25,000s	
White Balance		Auto/Manual/Indoor/Outdoor	
Gain control		Auto/Manual	
Day & Night control		Auto/Manual, time schedule	
Iris control		Auto/Manual	
SNR		≥52dB	
3D DNR		Auto/Manual	
AE Enhancement		BLC, HLC, WDR	
Digital Zoom		16X	
EIS		N/A	
Privacy Mask		4 mask areas (ver5.1.1)	
Picture overlay		Logo picture could be overlaid on video with 128x128pixels,24bits format	
OSD overlay		Max 15 characters/line, 8 lines, white or red font color	
Lens			
Focus length		f=4.8-154mm,32x optical zoom	
Zoom Speed		Approx. 4.6s (optical zoom, wide-tele)	
Field of View		Horizontal: 61.3 °~2.18 °; Vertical: 36.9 °~ 1.22 °; Diagonal: 68.4 °~ 2.5 °(wide-tele) ±5%	
Image distance		Wide: 1.0m ~ INF; tele: 1.5m ~ INF	
Aperture Type		F1.3~F4.8(W-T), HALL_IRIS	
IRCut type		Removable IRCF, reflection type	
DORI table	Focus length	f=4.8mm	f=154mm
	Detect	143.4m(326.8 f.t.)	4093.8m(8126.6f.t.)
	Observe	56.9m(129.7 f.t.)	1624.5m(3250.7 f.t.)
	Recognize	28.7m(65.4 f.t.)	818.8m(1625.3f.t.)
	Identify	14.3m(32.7 f.t.)	409.4m(812.7 f.t.)
PTZ			
Pan Range		360 °endless	
Pan speed		Configurable, from 0.1~360 °s; Preset speed: 330 °s	
Tilt Range		Mechanical -25 °to 155 °; auto flip at 90 °	
Tilt Speed		Configurable, from 0.1 °~210 °s, Preset speed: 180 °s	
Proportional Zoom		Yes	
Preset		360	
Cruise		8 cruises, up to 16 presets for each cruise (ver5.1.1)	
Trace		4 traces, record time over 3 minutes for each trace(ver5.1.)	
Power off memory		Support	
Action mode		Preset/Cruise/Trace/Auto Scan/Random Scan	
3D Positioning		Support	
PTZ status display		Support	
Schedule Task		Preset/Cruise/Trace/Random Scan/Boundary Scanning /Dome reboot	
IR			
IR Distance		200m (656 f.t.)	
IR type		8pcs of 5W 855nm IR Array, 4groups	
Smart IR		Yes	
Network			
Mainstream		50Hz/25fps: 3840×2160, 2560×1440, 1920×1080, 1280×960, 1280×720 60Hz/30fps: 3840×2160, 2560×1440, 1920×1080, 1280×960, 1280×720	

Sub stream	50Hz/25fps (704 × 576, 640 × 480, 352 × 288) 60Hz/30fps (704 × 480, 640 × 480, 352 × 240)	
Third Stream	50Hz/25fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 576, 640 × 480, 352 × 288) 60Hz/30fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 480, 640 × 480, 352 × 240)	
Video compression	H.265+/H.265/H.264+/H.264/MJPEG	
H.264 Standard	H.264/AVC codec BP/MP/HP, Level 5.1	
H.265 Standard	H.265/HEVC codec MP, level 5.0	
Video Bit Rate	64 Kbps to 16Mbps	
Audio compression	G.711 A/U	
Audio Bit Rate	64K bps	
Protocols	HTTP, HTTPS, IPv4/IPv6, 802.1x, QoS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP/IP, UDP, IGMP, ICMP, DHCP, PPPoE, P2P, RTMP	
User / Host	Up to 16 users, 3 levels: Administrator, Advanced User and Normal User	
Security Measures	User authentication (ID and PW), Host authentication (MAC address); HTTPS encryption, IEEE802.1x port-based network access control; IP address filtering	
API	ONVIF G/S/T, support TVT SDK and third-party management platform	
Client	TVT N9000 1.4.7, TVT NVMS 2.0; and the third-party client, free iOS and Android App	
Web Browser	IE8-11 with plug-in; Edge, Chrome, Firefox with plugin free	
Smart Features		
Basic event	Motion detection, Video tampering alarm, Exception (Network disconnected, IP address conflict, SD full, SD error)	
Face recognition	Face detection, capturing (Default off, open per request) face comparison. Max 15 faces at the same times	
Road traffic	Vehicle detecting and tracking	
Smart Detection	Tripwire, Bi-directional tripwire, Illegal intrusion detection, Region entrance detection, Region exiting detection	
Smart Tracking	Support smart tracking of human or vehicle, auto/manual	
System Integration		
Alarm Interface	1 Alarm input (Dry contact); 1 Alarm output	
Audio Interface	1 audio input, line level, 2.0-2.4Vpp, impedance 1KΩ; 1 audio output, line level, impedance,600Ω	
Alarm Linkage	Alarm actions, such as Preset, Cruise, Trace, Memory Card Video Record, Trigger Recording, Notify Surveillance Center, Upload to FTP/Memory Card, Send Email, etc.	
Network Interface	1 RJ45 10M/100M Adaptive Ethernet; Support PoE++	
SD Card Slot	One MicroSD slot and chamber, up to 256G	
Built-in Speaker& Mic	N/A	
RS485	N/A	
BNC	N/A	
Reset button	Yes	
Electric Heater & Fan	Yes	
Water removal	Remove water-drops by quick spinning	
Demist	Active electric heating and air loop	
General		
languages	Czech; English, German, Hungarian, Italian, Japanese, Korean, Portuguese, Polish, Russian, Romanian, Spanish, Spanish (Mexico), Simplified Chinese, Turkish, Traditional Chinese	
Power	Power consumption	avg. 14W, max 29W, including IR 10W
	Power adaptor	AC24V ±25%/3000mA, DC24V ±25%2500mA
	Power over ethernet	PoE++ (802.3.bt,class 6) midspan, network switch, router or high power NVR
Working condition	-40 ℃ ~ 65 ℃ (-40 ℉ ~ 149 ℉), IR off; -40 ℃ ~ 45 ℃, IR on; Cold start at - 30 ℃; 90%RH	
Storage condition	-40 ℃ ~ 70 ℃; ≤ 95% RH	
Protection	6000V Lightning Protection, Surge Protection and Voltage Transient Protection	
Shield Material	Aluminum Alloy (ADC12); Polymer (PC+GF15%)	
Dimensions	Φ 197mm × 302mm (Φ7.8 inch ×11.9 inch)	
Net Weight	Approx. 2.82 Kg (6.22 lb.)	
Certification	IP67, IK10, ROHS, CE, FC, KC, BIS, UKCA	

Ordering information:

TD-8583IE3N(PE/32M/AR20)	8MP 32X IR 200m PoE++ Network AI NDAA 5inch Speed PTZ Camera, IP67/IK10, AC24V,DC24V or PoE++, not include power adaptor & bracket
--------------------------	--

Dimensions(mm/inch):

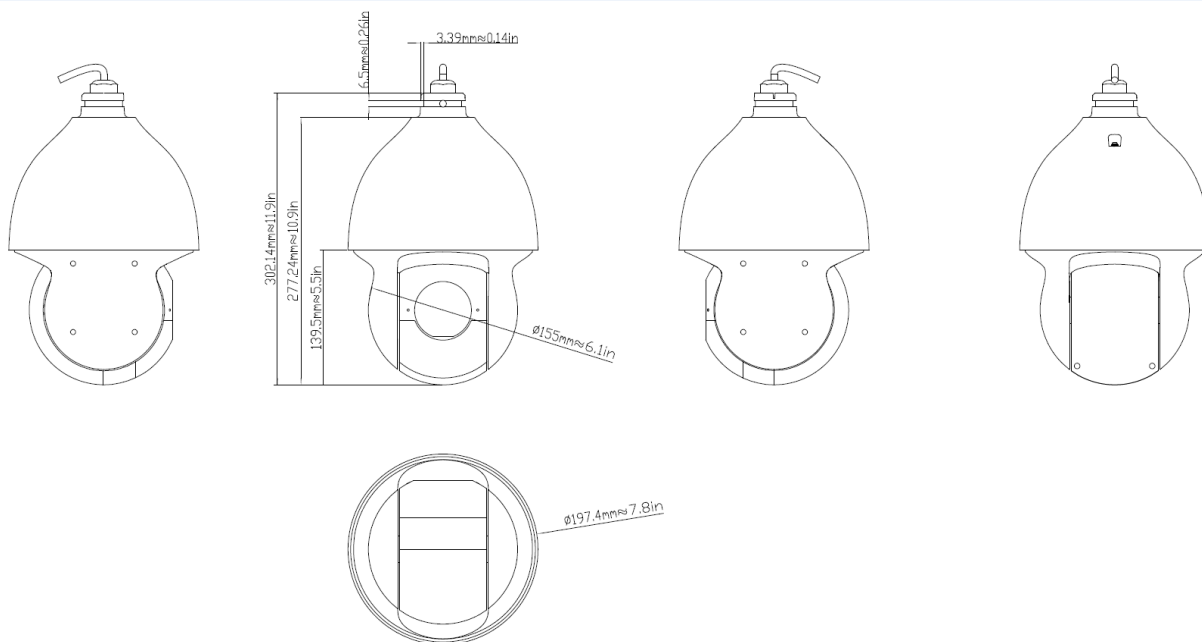

Accessories(optional):



TD-YZJ0321
Wall mounting bracket



TD-YZJ0321+TD-YZJ0501
Pole mounting bracket



TD-YZJ0321+TD-YZJ0601
Corner mounting bracket



TD-YZJ0807
Pendant mounting bracket



TD-YZJ0311
Wall mounting bracket
with junction box



TD-YZJ0312
Pole mounting bracket
with junction box



TD-YZJ0313
Corner mounting bracket
with junction box



TD-K23
PTZ Keyboard



DC24V/2.5A power adaptor



AC24V/3A Power adaptor



TD-B902
PoE++ (60W) Midspan

* All pictures and texts are for reference only. Actual product may vary due to product enhancement