www.anrecson.com.cn

LC-MS5001(50" Metal Case Monitor)





Product Feature

- Industrial level DID LCD panel, suitable for extensive 7×24 continuous works.
- Physical resolution of 1920×1080.
- 5ms fast response time, no image ghosting.
- Adapt newest 3D digital filtering and 3D digital noise reduction technology.
- Picture fast response; 178° wide viewing angle; Ensure that the image display is not deformed.
- High fidelity digital processing, brilliant and vivid video.
- Built-in speaker.
- Humanize Menu; Convenient Controller

DNIe digital image processing

Dynamic optimization



Natural color




Contrast enhancement



Detail enhancement



120Hz Dynamic processing

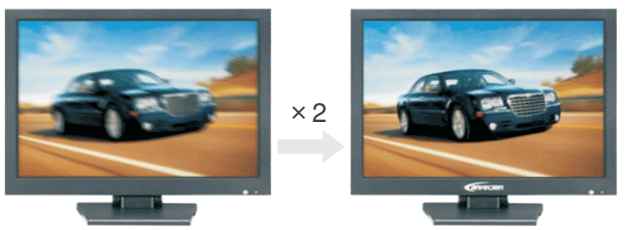

General montior

Anrecson monitor



DISPLAY CHARACTERISTICS

Mode Name	LC-MS5001
Screen Size	50''
Active Display Area (mm)	1095.84mm(W)×616.41mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	1920 × 1080
Display Color	16.7M
Pixel Pitch(mm)	0.57075(H)×0.57075(V)
Brightness(nits)	400cd/㎡
Contrast Ratio	5000:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED

INPUT&OUTPUT

HDMI 2.0	1
VGA	1
BNC input	2
BNC output	1
Speaker	2x3W(Stereo)

VIDEO

Color System	PAL/NTSC/SECAM
Compatible HDTV input	480P,576P,720P,1080I, 1080P
3D comb filter	YES
Video Noise Reduction	YES

POWER&Mount Way


Power	AC100V~240V,50/60Hz
Working Temperature	-30 to +85 ℃
Power Consumption	≦120W
Menu	Chinese/English(other languages supported)
Mounting/Weight	Stand mount, VESA mount/28kg
MTBF	50000Hours

ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide,VGA Cable



Unit:mm

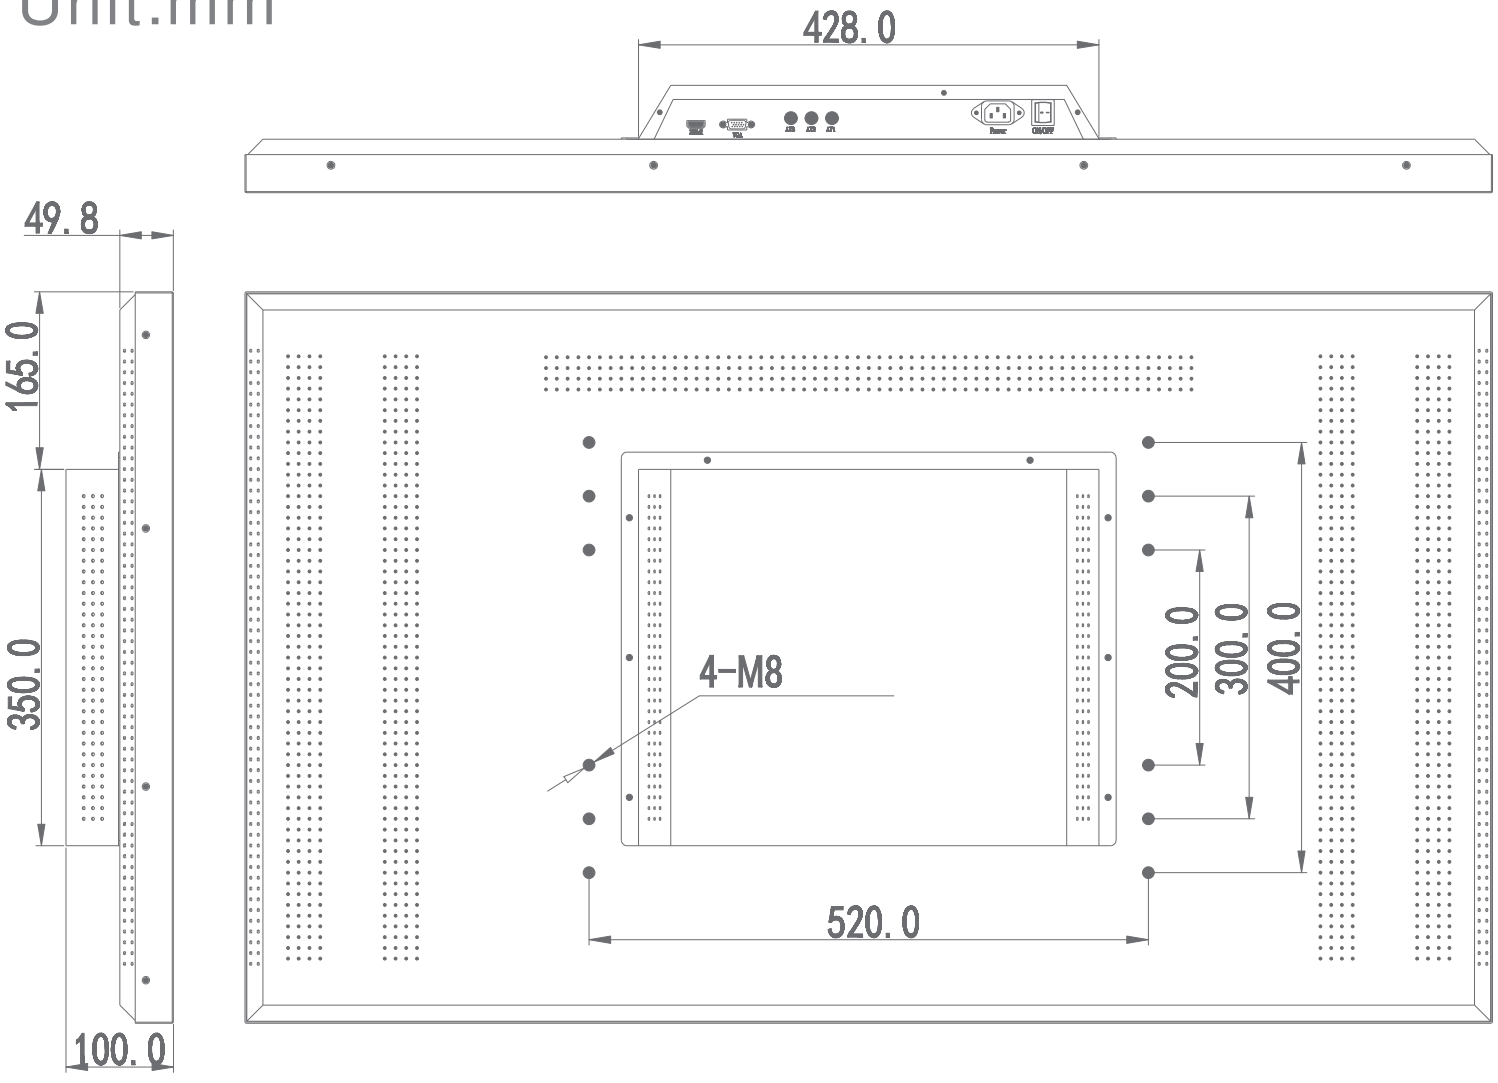

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice.
All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© ANRECSON CORPORATION ( ). ALL RIGHTS RESERVED.