www.anrecson.com.cn

LC-ME1041-BNC
(10.4" HDMI/VGA/BNC Plastic Case Monitor)



Metal housing | 24h*7 | 178 | VESA | 800p HDMI / VGA/BNC | 5ms

Product Feature

- Industrial level DID LCD panel, suitable for extensive 7×24 continuous works.
- Physical resolution of 800×600.
- 5ms fast response time, no image ghosting.
- Adapt newest 3D digital filtering and 3D digital noise reduction technology.
- Picture fast response; 178° wide viewing angle; Ensure that the image display is not deformed.
- High fidelity digital processing, brilliant and vivid video.
- Built-in speaker.
- Humanize Menu; Convenient Controller.

DNIe digital image processing

Dynamic optimization



Natural color




Contrast enhancement




Detail enhancement



120Hz Dynamic processing

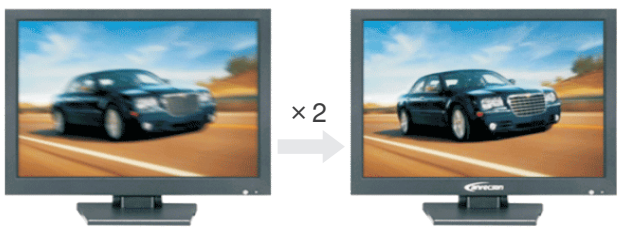


General montior



60Hz

Anrecson monitor



120Hz

DISPLAY CHARACTERISTICS

Mode Name	LC-ME1041-BNC
Screen Size	10.4''
Active Display Area (mm)	211.2mm(W)×158.4mm(H)
Display Mode	4:3
LED Type	TFT-LED
Resolution	800 × 600
Display Color	16.7M
Pixel Pitch(mm)	0.264(H)×0.264(V)
Brightness(nits)	350cd/㎡
Contrast Ratio	500:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED

INPUT&OUTPUT

HDMI 2.0	1
VGA	1
BNC input	2
BNC output	1
Speaker	2x3W(Stereo)

VIDEO


Color System	PAL/NTSC/SECAM
Compatible HDTV input	480P,576P,720P,1080I, 1080P
3D comb filter	YES
Video Noise Reduction	YES

POWER&Mount Way


Power	DC12V,50/60Hz
Working Temperature	-30 to +85 ℃
Power Consumption	≦10W
Menu	Chinese/English(other languages supported)
Mounting/Weight	Stand mount, VESA mount/1.5kg
MTBF	50000Hours

ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide

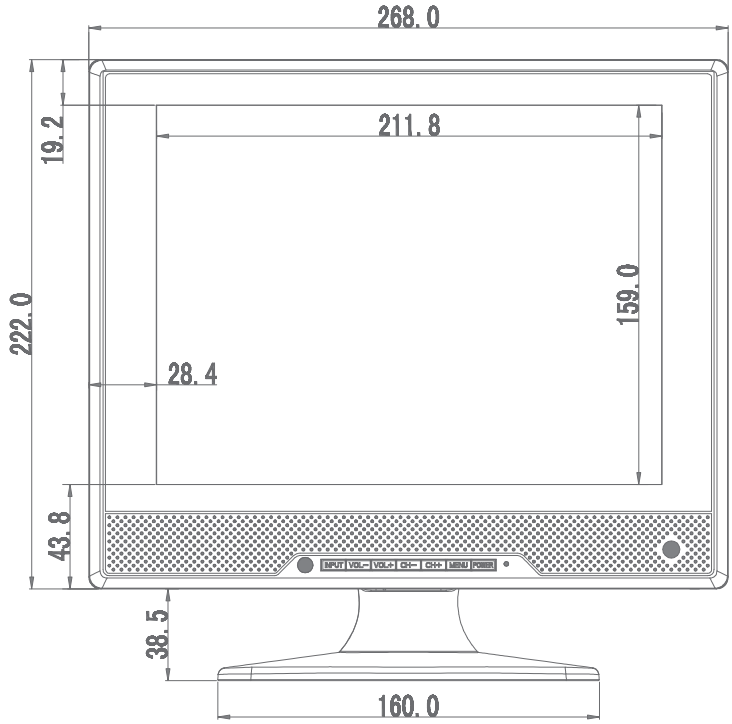

Unit:mm

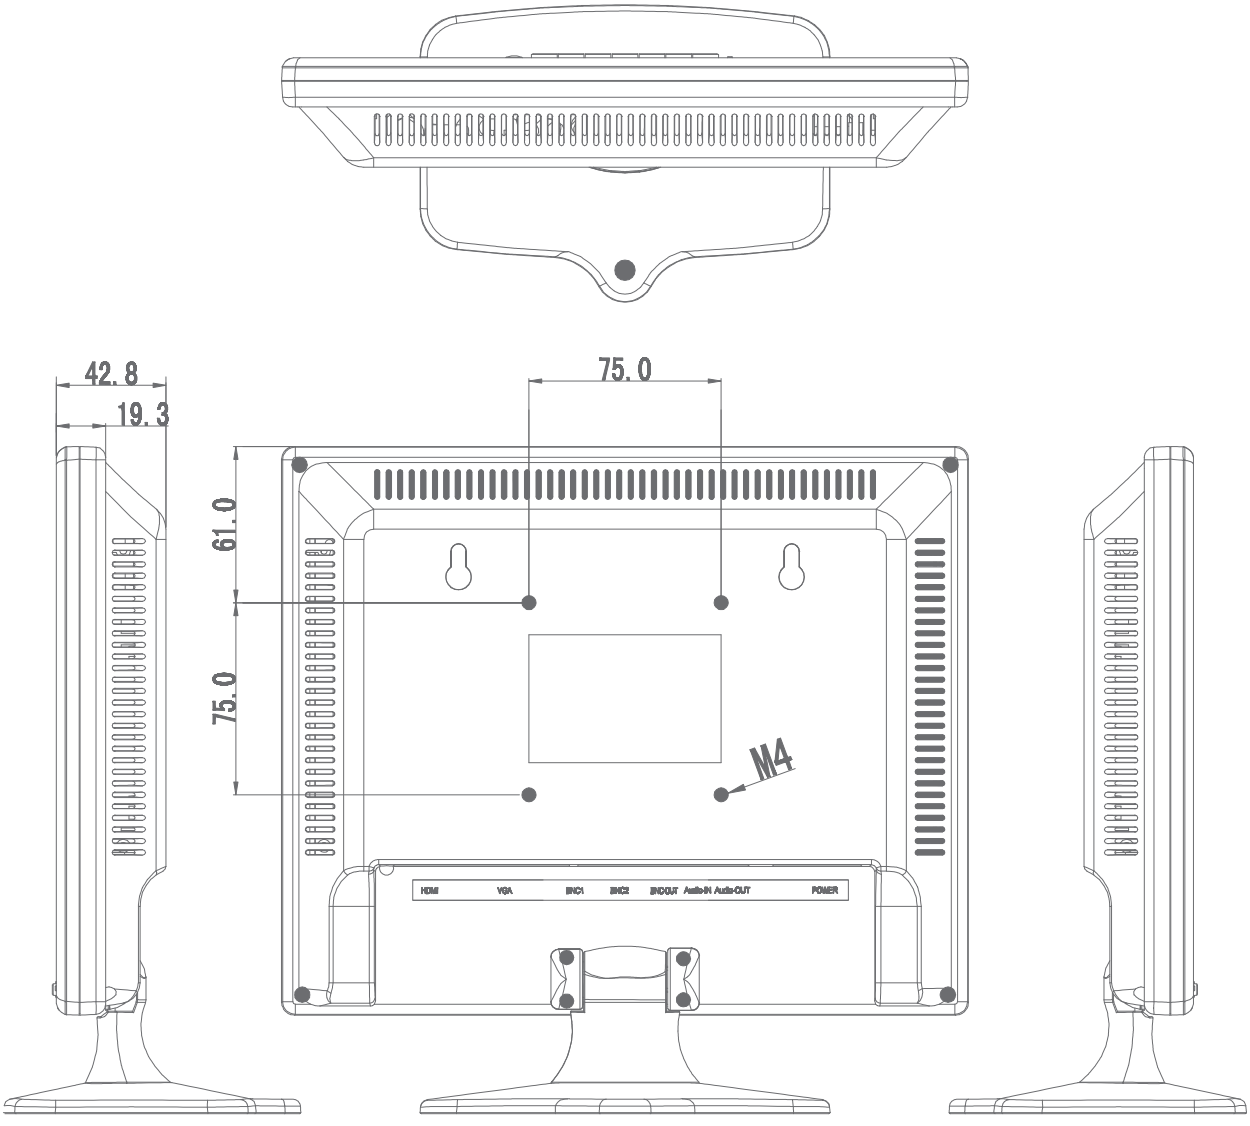

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice.
All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© ANRECSON CORPORATION ( ). ALL RIGHTS RESERVED.