www.anrecson.com.cn

LC-MS2403
(24" TVI/CVI/AHD Metal Case Monitor)



Metal housing | 24h*7 | 178 | VESA | 1080p HDMI / VGA/BNC | 5ms

Product Feature

- Industrial level DID LCD panel, suitable for extensive 7×24 continuous works.
- Physical resolution of 1920×1080.
- Support TVI (4MP/5MP) Cameras :300M;
- Support AHD(4MP/5MP)Cameras:500M;
- Support CVI (2MP/4MP)Cameras:500M;
- High fidelity digital processing, brilliant and vivid video.
- 3D digital noise reduction technology;
- Humanize Menu; Convenient Controller.

DNIe digital image processing

Dynamic optimization



Natural color



Contrast enhancement



Detail enhancement



120Hz Dynamic processing



DISPLAY CHARACTERISTICS

Mode Name	LC-MS2403
Screen Size	24''
Active Display Area (mm)	521.28mm(W)×293.22mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	1920 × 1080
Display Color	16.7M
Pixel Pitch(mm)	0.248(H)×0.248(V)
Brightness(nits)	350cd/㎡
Contrast Ratio	1000:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED

INPUT&OUTPUT

HDMI 2.0	1
VGA	1
BNC output	1(Add BNC Extender) 
BNC input	1
TVI/CVI/AHD/CVBS	Support

VIDEO


Color System	PAL/NTSC/SECAM
OSD Control	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language..
3D comb filter	YES
Video Noise Reduction	YES

POWER&Mount Way


Power	DC12V~24V,50/60Hz
Working Temperature	-30 to +85 ℃
Power Consumption	≦25W
Menu	Chinese/English(other languages supported)
Mounting	Stand mount, VESA mount
MTBF	50000Hours


ACCESSORIES


INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide

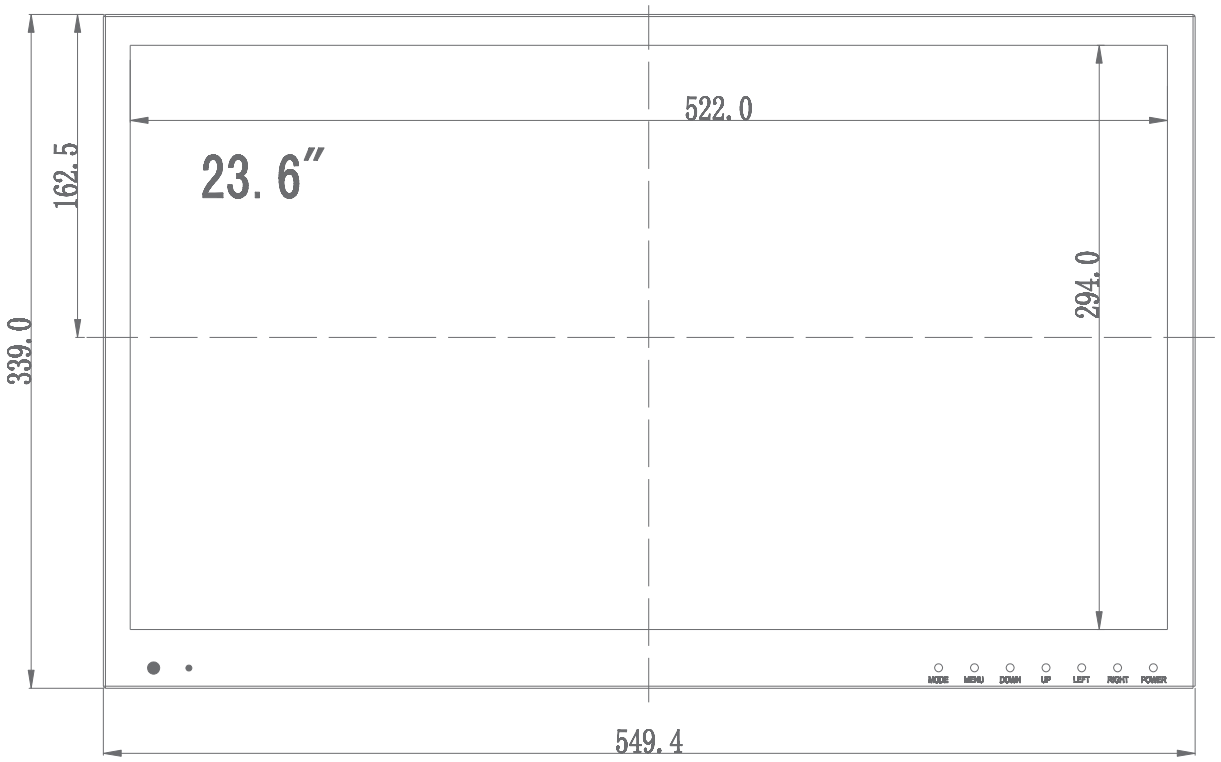

Unit:mm

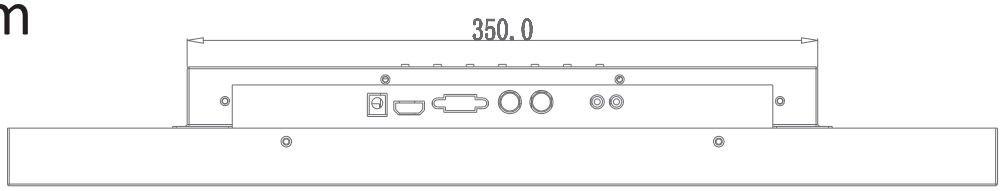

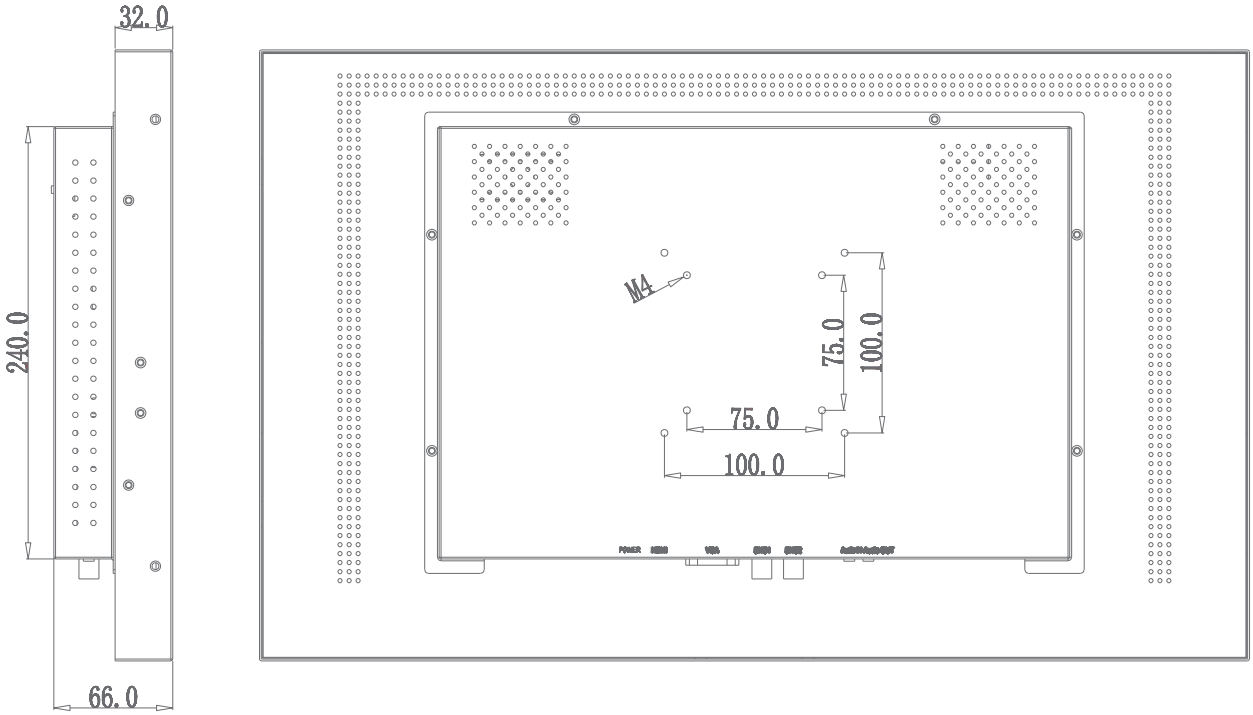

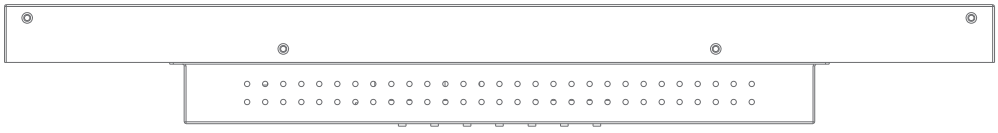

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice.
All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© ANRECSON CORPORATION ( ). ALL RIGHTS RESERVED.