www.anrecson.com.cn

LC-MS1001-BNC
(10.1" Metal Case HDMI/VGA/BNC Monitor)





Product Feature

- Industrial level DID LCD panel, suitable for extensive 7×24 continuous works.
- Physical resolution of 1280×800.
- 5ms fast response time, no image ghosting.
- Adapt newest 3D digital filtering and 3D digital noise reduction technology.
- Picture fast response; 178° wide viewing angle; Ensure that the image display is not deformed.
- High fidelity digital processing, brilliant and vivid video.
- Built-in speaker.
- Humanize Menu; Convenient Controller.

DNIe digital image processing

Dynamic optimization



Natural color



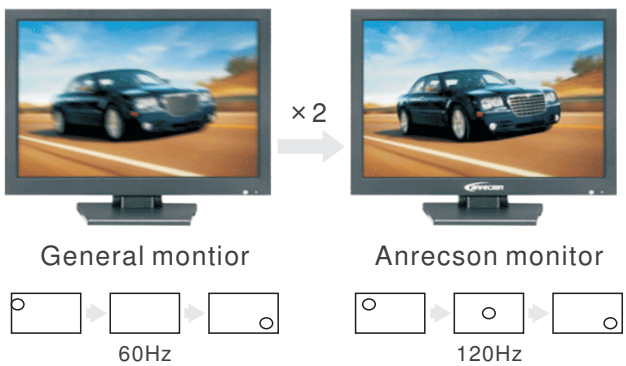
Contrast enhancement



Detail enhancement



120Hz Dynamic processing



DISPLAY CHARACTERISTICS

Mode Name	LC-MS1001-BNC
Screen Size	10.1''
Active Display Area (mm)	211.2mm(W)×158.4mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	1280 × 800
Display Color	16.7M
Pixel Pitch(mm)	0.630(H)×0.630(V)
Brightness(nits)	350cd/㎡
Contrast Ratio	1000:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED

INPUT&OUTPUT

HDMI 2.0	1
VGA	1
BNC input	2
BNC output	1
Speaker	2x3W(Stereo)

VIDEO

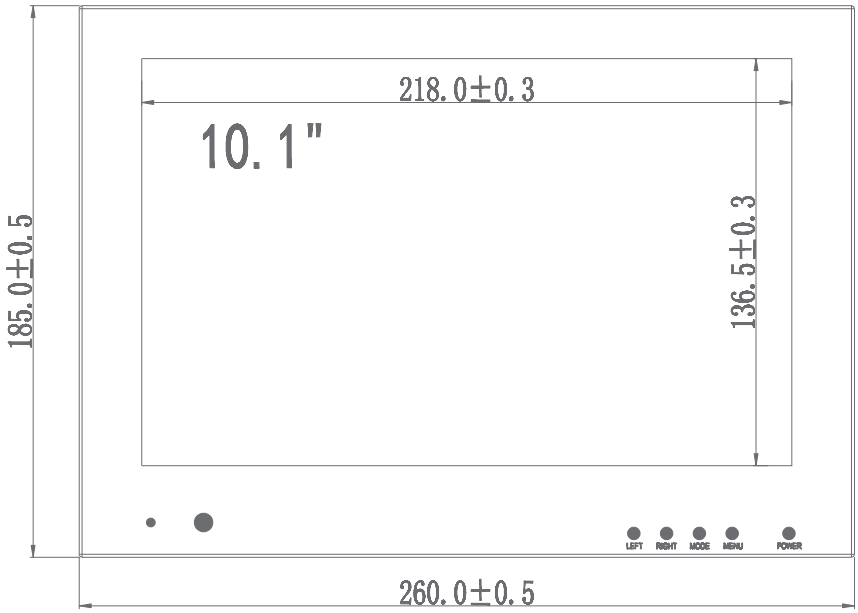
Color System	PAL/NTSC/SECAM
Compatible HDTV input	480P,576P,720P,1080I, 1080P
3D comb filter	YES
Video Noise Reduction	YES

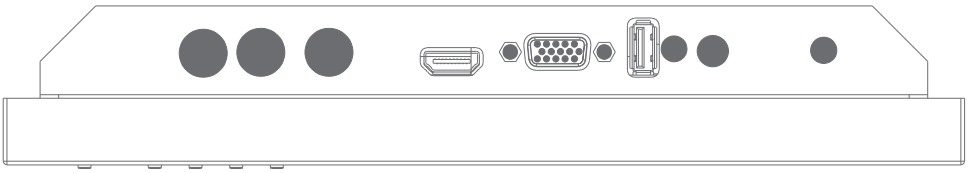
POWER&Mount Way

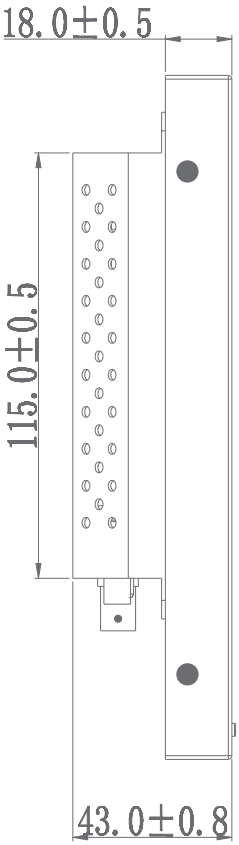
Power	DC12V,50/60Hz
Working Temperature	-30 to +85 ℃
Power Consumption	≦10W
Menu	Chinese/English(other languages supported)
Mounting/Weight	Stand mount, VESA mount/4.5kg
MTBF	50000Hours

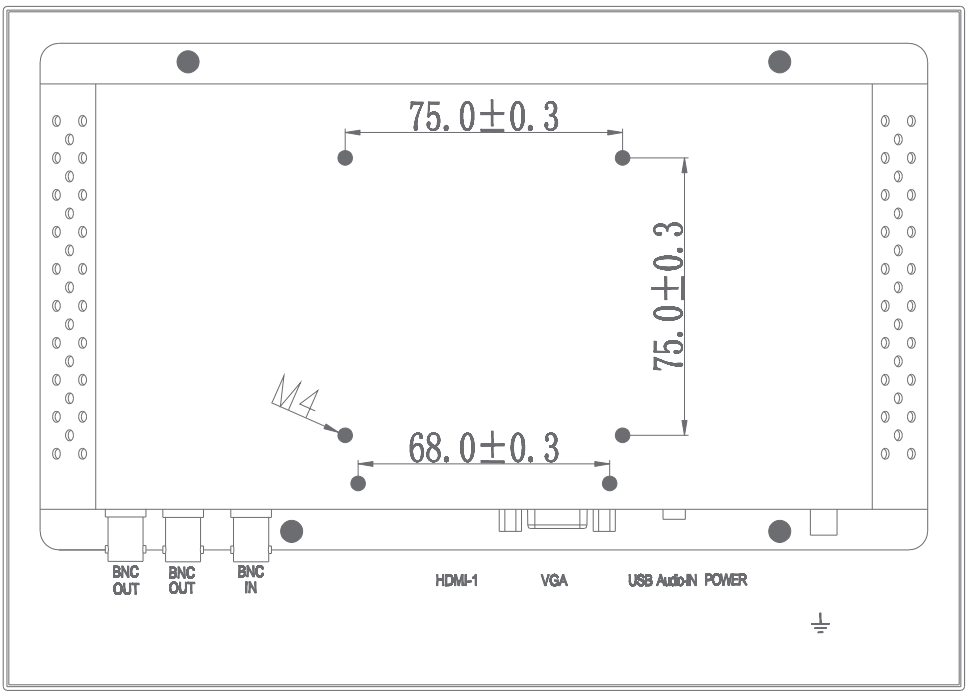
ACCESSORIES

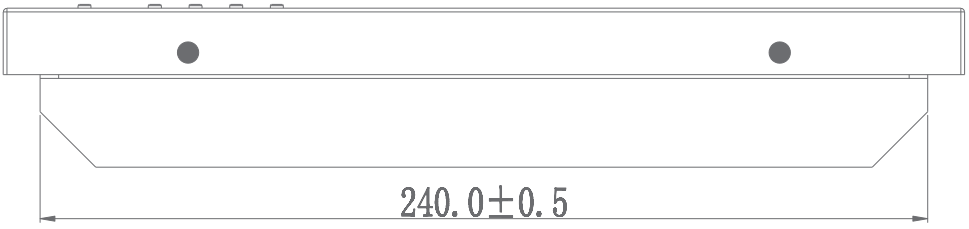
INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide


218.0±0.3
10.1"
185.0±0.5
136.5±0.3
LEFT
RIGHT
MODE
MENU
POWER
260.0±0.5




18.0±0.5
115.0±0.5
43.0±0.8


75.0±0.3
75.0±0.3
M4
68.0±0.3
BNC OUT
BNC OUT
BNC IN
HDMI-1
VGA
USB Audio-IN
POWER


240.0±0.5