


TD-K23

Network Keyboard

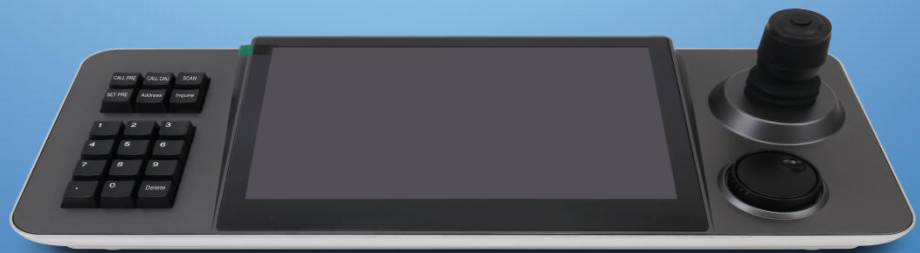

TD-K23 is a new generation of Android system network touch keyboard which is designed and manufactured by TVT, built in 10.1 inch capacitive touch screen, simple and friendly UI design. The real-time image can be viewed on the keyboard screen and the image will be displayed on the external monitor through the HDMI Interface. In platform mode, it supports H.265 1 CH 1080P@30fps decoding; in PTZ mode, it supports H.265 1 CH 4K@30fp, H.264 1 CH 1080P@60fp, or 4 CH 720P@30fps decoding and its 4D Joystick can be used for PTZ Control and fast positioning target.

It can be connected to the surveillance management platform to control a TV Wall, such as viewing plan, video playback, screen display mode switch, decoding on TV wall, etc. It also can be used in various places where multiple network PTZ cameras are installed, such as schools, hospitals, hotels, residential areas, factories, workshops, etc., to achieve a unified control for network PTZ cameras with onvif protocol via LAN.

Shenzhen TVT Digital Technology Co., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R. China

Tel: +86-755-36995888

Website: <http://en.tvt.net.cn>

Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn

Features

- 10.1 inch capacitive touch screen
- Android 6.0 operating system
- H.264/H.265 decoding ; single screen display in platform mode; a maximum of 4-screen display in PTZ mode
- Supports viewing images on the touch screen or outputting images on the external monitor via HDMI interface
- ONVIF protocol supported
- Supports USB flash disk upgrade, USB mouse
- The full range of our PTZ cameras can be connected via the network
- Supports PTZ control, preset, cruise and track setup and calling
- Up to 1024 devices can be added
- Supports our surveillance management platform access
- Supports the control of the TV Wall in the platform, including viewing plan, screen display mode switch, decoding on TV wall, PTZ control, video playback, etc.

Specifications

Operating system	Android 6.0
Screen size	IPS 10.1 inch screen, 1280*800 capacitive touch screen
Display	HDMI 4K@30fps
Decoding capability	Platform mode: Max.H.265 1CH 1080p@30fps PTZ mode: Max.H.265 1CH 4k@30fps, H.264 1CH 1080P@60fps or 4CH 720p@30fps;
Protocol	ONVIF 2.4
Function	Up to 1024 devices can be added in PTZ mode; PTZ control: preset/cruise/scan... Supports the access of surveillance platform in platform mode; The plan, screen display, live view, PTZ and playback in the TV wall management of a platform can be controlled
System settings	Supports language settings, password modification, date and time settings and USB flash disk upgrade; restore to factory default setting
Power	Standard 5.5/2.1 Power interface, DC 12V2A±10%
Interfaces	1 RJ45 Ethernet port; 1 RS485; 1 RS232; 1 HDMI output(V 1.3); 1 USB2.0 port; 1 standard 3.5mm headphone jack
Operation interface	4D Joystick, Knob, Buttons
Power consumption	<15W
Standby current	<100mA
Mean time between failures	>30000h
Working humidity	10%-90%(RH)
Working temperature	-10°C-40°C
Storage temperature	-40°C-60°C
Dimensions(mm)	450x179x115
Net weight (kg)	Approx. 1.388

Dimensions

