www.anrecson.com.cn

LC-MS7501-4K
(75" Industrial 4K Metal Case Monitor)





Product Feature

- 4K HD Solution
- Using all-imported industrial-grade LED screen, Designed for CCTV.
- High brightness, High contrast, High definition.
- Adapt newest 3D digital filtering and 3D digital noise reduction technology.
- Picture fast response; 178 ° wide viewing angle; Ensure that the image display is not deformed.
- 7/24 working Status; Continue working 5 years.
- Metal chassis design, Anti-static, Anti-magnetic field, Anti-interference, no radiation.
- Humanize Menu; Convenient Controller.

DNIe digital image processing

Dynamic optimization



Natural color



Contrast enhancement



Detail enhancement



4K UHD HD resolution

UHD Quality

3840P/2160P

4*FUHD/8*HD



DISPLAY CHARACTERISTICS

Mode Name	LC-MS7501-4K
Screen Size	75''
Active Display Area (mm)	1605.3mm(W)×933.75mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	3840 × 2160
Display Color	1.073G
Pixel Pitch(mm)	0.372(H)×0.372(V)
Brightness(nits)	350cd/m2
Contrast Ratio	3000:1
Viewing Angle	178(H) /178(V)
Response Time	8ms
Backlight	LED

INPUT&OUTPUT

DVI	0
VGA	0
DP	1
HDMI 2.0	3
Speaker	2x3W(Stereo)

VIDEO

Color System	PAL/NTSC/SECAM
OSD Control	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language..
3D comb filter	YES
Video Noise Reduction	YES

POWER&Mount Way


Power	AC100V~240V,50/60Hz
Working Temperature	-30 to +85
Power Consumption	<140W
Menu	Chinese/English(other languages supported)
Mounting/Weight	VESA mount/45kg
MTBF	50000Hours

ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide



Unit:mm

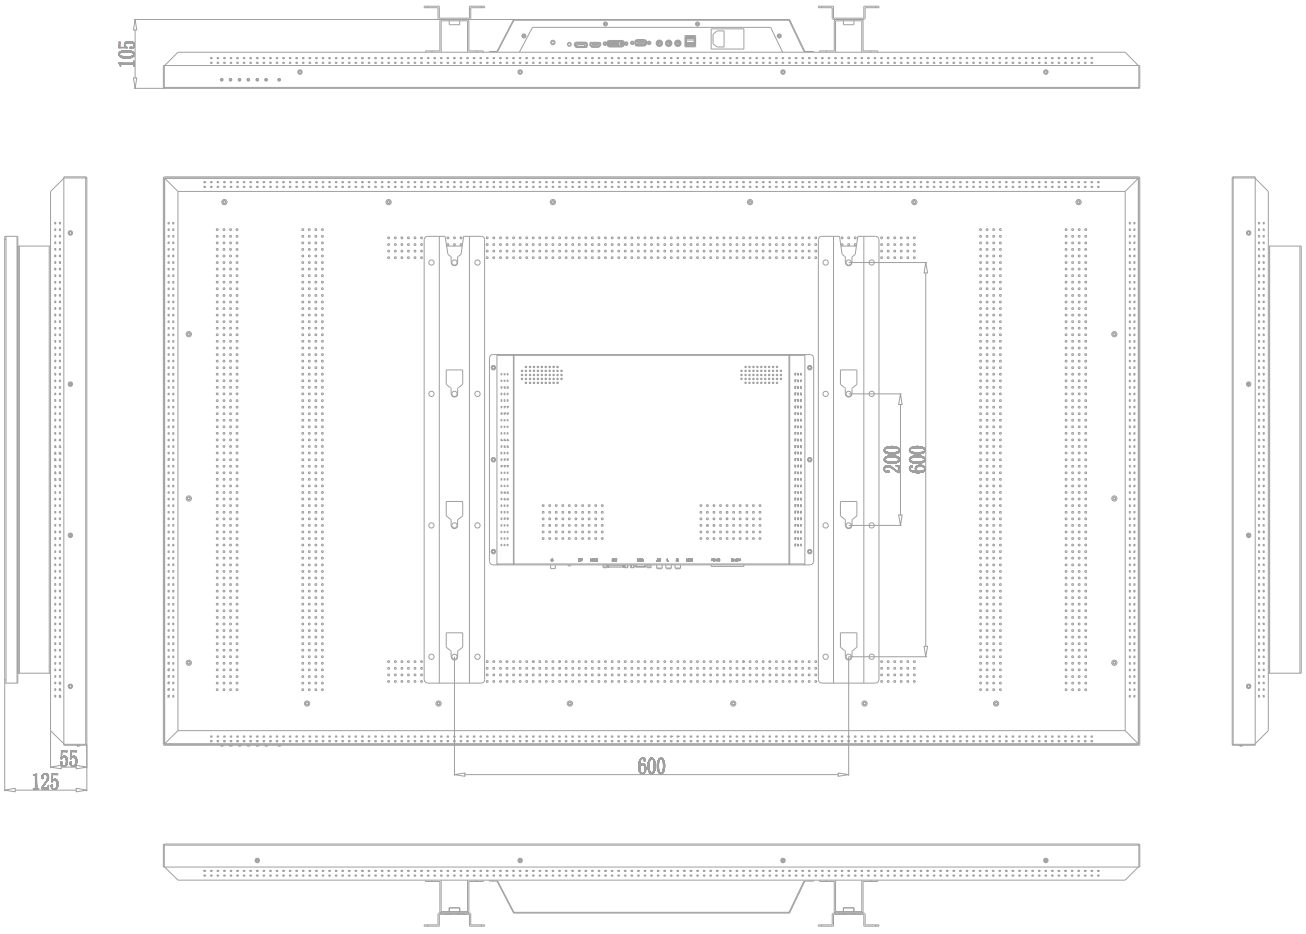

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice.
All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© ANRECSON CORPORATION ( ). ALL RIGHTS RESERVED.